

Z axis | P11.Z200S/K

Piezo Nanopositioning Stages



Introduction

P11.Z200 is a small-volume 1 axes piezo nanopositioning stage. It adopts a nofriction flexible hinge guiding mechanism and amplified-drive mechanism to ensure 200 μ m displacement. Closed-loop version could achieve positioning accuracy up to nano-scale. It has excellent control precision, the resolution and stability could reach nanometer level, stabilization time is only milliseconds, the stage is non-magnetic material, and is not affected by the magnetic field in operating.

Characteristics >>

- Z motion
- Stroke to 200 μ m
- Small size
- Fast response time
- Vacuum version available

Applications >>

- Laser interference
- Nano-measurement
- Nano imprint
- Scanning microscope
- Quality assurance test
- Micromachining / precision control
- Biotechnology
- Nanopositioning



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790 Email: info@coremorrow.com
Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin
Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai

Technical Data >>

Type	S-Closed loop K-Open loop	P11.Z200S	P11.Z200K	Units
Active axes	Z	Z	Z	
Travel range(0~120V)	160	160	160	$\mu\text{m}\pm 20\%$
Travel range(0~150V)	200	200	200	$\mu\text{m}\pm 20\%$
Sensor	SGS	-	-	
Closed/open loop resolution	5.5	2	2	nm
Linearity	0.15	-	-	%F.S.
Repeatability	0.06	-	-	%F.S.
Pitch/yaw/roll	<10	<10	<10	μrad
Push/pull force	70/6	70/6	70/6	N
Stiffness	0.45	0.45	0.45	$\text{N}/\mu\text{m}\pm 20\%$
Unloaded resonant frequency	0.18	0.18	0.18	$\text{kHz}\pm 20\%$
Closed/open-loop unloaded step time	10	0.8	0.8	$\text{ms}\pm 20\%$
Load capacity	0.5	0.5	0.5	kg
El. capacitance	3.6	3.6	3.6	$\mu\text{F}\pm 20\%$
Operating temperature ^[1]	-20~80	-20~80	-20~80	$^{\circ}\text{C}$
Material	Steel, Al	Steel, Al	Steel, Al	
Size(L×W×H)	40×40×22	40×40×22	40×40×22	mm
Mass	170	170	170	$\text{g}\pm 5\%$
Cable length ^[2]	1.5	1.5	1.5	$\text{m}\pm 10\text{mm}$
Connector ^[2]	-	-	-	


Note: Max driving voltage could be -20V~150V, 0~120V is recommended for long-term and high-reliable operation. Unless otherwise specified, the above parameters are measured at room temperature about 25°C.

[1] Custom ultralow temperature and ultrahigh vacuum versions are available.



[2] Custom cable length and connector is available.

Note: The parallelism of the moving platform is about 20 μm , and the roughness is about 1.6 to 3.2. Please contact the sales engineer for confirmation before purchase.

Drawing >>

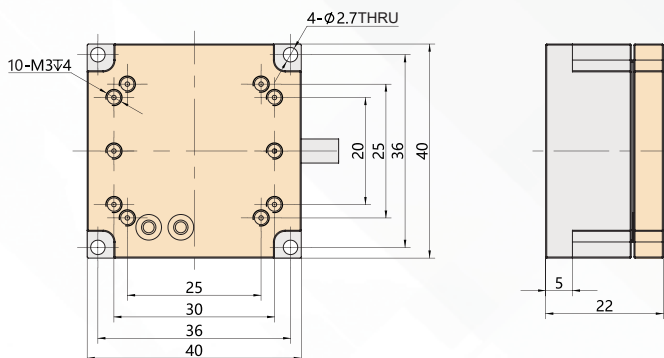

Curves >>

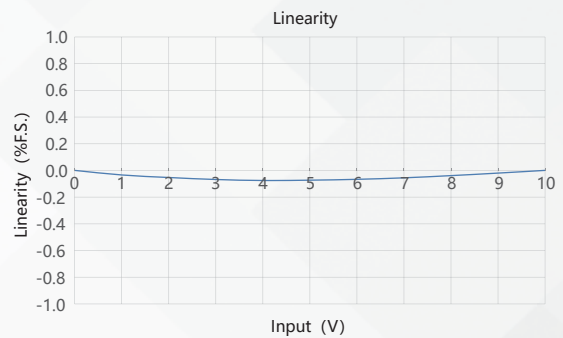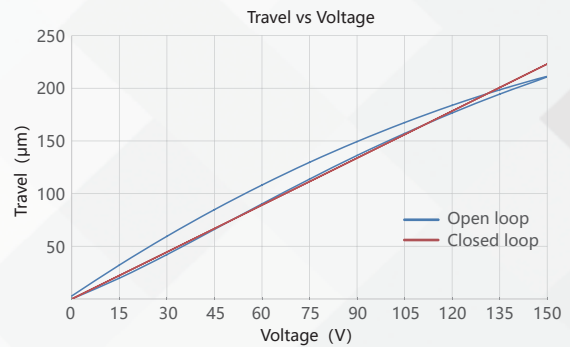

Disclaimer: The data here are typical, only for reference. Some variations will occur for different batch.

Recommended Controllers >>



E01.D1
 LCD, membrane button, up to 625mA
 RS-232/RS-422/USB interface
 Software secondary development



E53
 Small size, 60mA
 RS-232/RS-422/USB interface
 Software secondary development



Harbin Core Tomorrow Science & Technology Co., Ltd.

Tel: +86-451-86268790 Email: info@coremorrow.com

Fax: +86-451-86267847 Web: www.coremorrow.com

Headquarters: Building I2, No.191 Xuefu Road, Nangang District, Harbin

Shanghai Office: Building 2, No.608 Shengxia Road, Pudong District, Shanghai